



This drawing is the property of Pacific Mobile Structures, Inc. and may not be duplicated without approval. Actual features may vary due to available inventory.

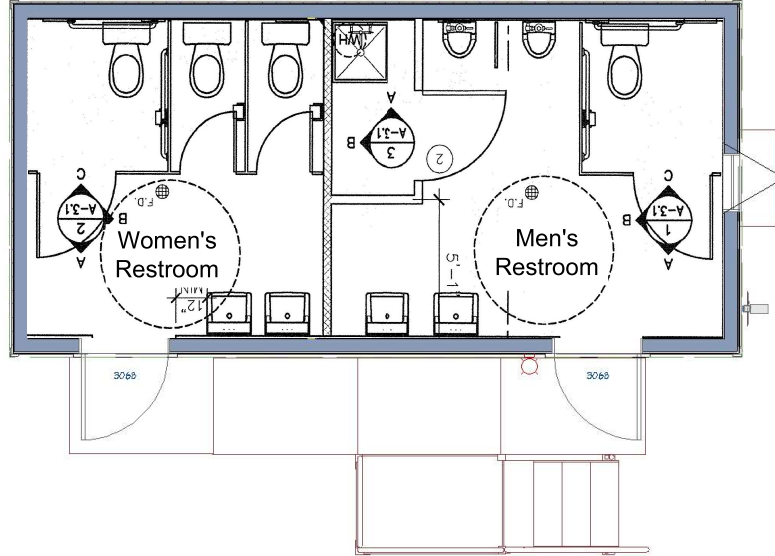

PANEL SCHEDULE											
NOTE: ALL CONDUCTORS COPPER.						100 AMP					
						Calculated Load - 80.08 Connected Load - 78.80					
CKT NO.	DESCRIPTION	TRIP AMPS	WIRE SIZE	VOLT AMPS	100		VOLT AMPS	WIRE SIZE	TRIP AMPS	DESCRIPTION	CKT NO.
					A	B					
1	LIGHTS	20	12	514			7812	4	90	HVAC	2
3	RECEPTACLES	20	12	540			7812	/	/	/	4
5	SPACE	-	-	-			1650	12	20	WATER HEATER	6
7	SPACE	-	-	-			500	12	20	HEAT TRACE*	8
9	SPACE	-	-	-			-	-	-	SPACE	10
11	SPACE	-	-	-			-	-	-	SPACE	12

*GROUND FAULT EQUIPMENT PROTECTION DEVICE

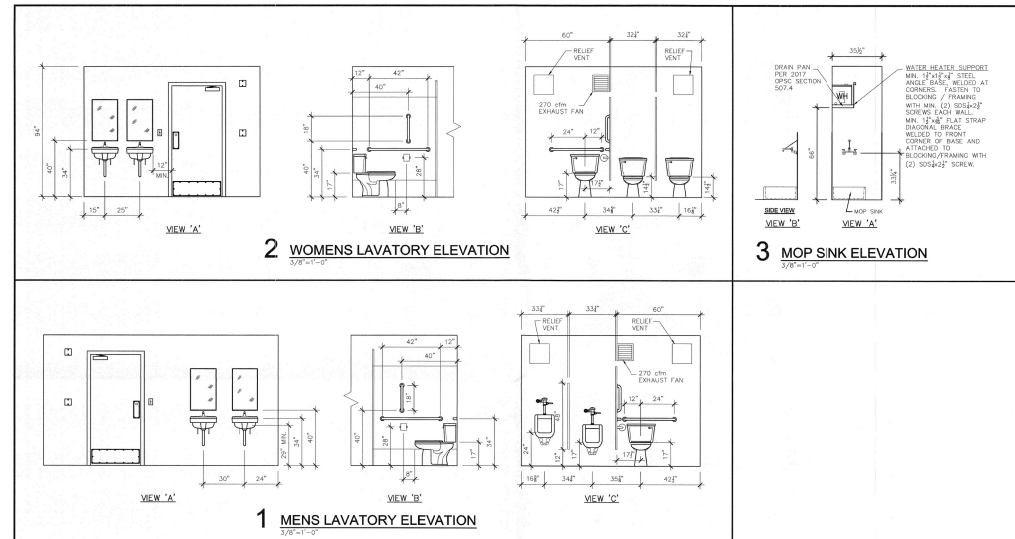

LEGEND EP Panel Box P Porch Light T Thermostat D Duplex Outlet S Light Switch K Empty data box — Perm. Interior wall - - - Temp. Interior wall

FEATURES

- Outrigger Chassis w/hitch
- Sheet vinyl flooring
- FRP interior wall covering
- 8' suspended ceiling
- 2x4 troffer lights
- Endwall HVAC w/ducted supply - 100% fresh air
- White EPDM roof
- LP SmartPanel siding
Grey siding / Blue trim
- Horizontal sliding windows w/blinds
- 3068 Painted steel exterior doors w/closer, passage, and deadbolt